

# ALPHACOM XE7 AUDIO SERVER

WITH HD VOICE



when communication is **critical**

## FEATURES

- Made to provide critical communication in any environment
- Supports 552 IP stations and 36 analog intercom stations
- Global networking and integration
- IP, SIP and analog station support
- Extended Software Options
- SIM card based software configuration and disaster recovery
- Fully compatible with any AlphaCom system
- Extended memory supports future expansion and new services
- High Quality Professional PA Broadcasting and Messaging services
- Security voice guidance for public safety and building security
- Auto-attendant functionality (Automatic voice supported switchboard)
- Voice supported call guidance



## DESCRIPTION

With AlphaCom XE, flexibility is key. You can have just a few or thousands of users spread around different locations. Thanks to its open, modular design and scalable architecture, AlphaCom XE has the flexibility to grow with your business and adapt to your long term needs. The system can be tailored to support applications of almost unlimited specificity and complexity.

STENTOFON's CCoIP® (Critical Communication over IP) implies the employment of Voice over IP applications required in critical situations. AlphaCom XE is designed with CCoIP incorporation which ensures the delivery of instant and secure voice and data services. The AlphaCom XE system provides carrier class system availability and protects resources in an IP environment by using embedded IP security mechanisms. The main security mechanisms used are restricted management access, separate management interface, internal firewall, integrity check (MD5), virtual LAN (IEEE 802.1Q) and network access control (IEEE 802.1X).

## SPECIFICATIONS


Dimensions (WxHxD)	427 x 133 x 380 mm / 16.81 x 5.23 x 14.96 inch.
Weight	7 kg / 15.43 lbs.
Power	260 W max, 24 VAC with auto switchover to 24 VDC
Mounting	Wall, shelf or 19" rack
Processor subsystem	Intel IXP425 with HW acceleration for packet processing and encryption
Media subsystem	DSP @ 1600 MIPS FPGA @ 400K gates
Storage subsystem	Solid state (64 MB Flash) SIM card (IP configuration, HW-ID)

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
1009608000	AlphaCom XE7 Package with 2 ASLTs - Version 11	9.0 kg/19.84 lbs.
1009608100	AlphaCom XE7 Package with 1 ASLT - Version 11	8.5 kg/18.73 lbs.
1009608106	AlphaCom XE7 with license for 6 stations & 1 ASLT - Version 11	8.5 kg/18.73 lbs.
1009608300	AlphaCom XE7 with license for 12 stations - Version 11	8.0 kg/17.63 lbs.
Related items:		
1009501100	AlphaCom XE7 installation kit for ASLT, ATLB12 and AGA cards	0.2 kg/0.44 lbs.
2030010260	Mains transformer, 6 A, 230/24 VAC for max 4 ASLT, ATLB12 or AGA cards	2.4 kg/5.29 lbs.
2030010270	Mains transformer, 11 A, 230/24 VAC for fully equipped module	4.2 kg/9.25 lbs.
1009291120	AlphaPro Professional, USB dongle	

## ALPHACOM XE7 AUDIO SERVER WITH HD VOICE

Memory	128 MB SDRAM, 1 MB NVRAM
Subscriber Capacity	552 intercom stations per server
Analog Stations	6 per line card
Analog Telephones	12 telephones per line card
Busy Hour Call	60 000 BHCA
IP Telephones	552 IP telephones per server
Integrity check	MD5 (RFC 1321)
IP priority	DiffServ, IP TOS
IP security	SSH, HTTPS, firewall
SIP	RFC 3261, SIP INFO, RE-Invite, RFC 2833, RFC 4733
VoIP Internal Networking	30 channels
VoIP External Networking	30 channels
ISDN Trunk	ISDN PRI (30 channels)
Analog Trunk	FXO (4 & 8 channels)
GSM Trunk	Quad band GSM
Other	Custom ASCII (EDIO), STENTOFON Data, Scripting engine
Configuration	AlphaPro over IP, Web
Monitoring and logging	SNMP trap, SNMP MIB, syslog, Web, e-mail, SqLite
SW Upgrade	Web, Automatic upgrade of IP station
Internal Audio Format	1-bit (18.5 KHz)
Analog Stations	18.5 KHz audio
General Audio Interface	18.5 KHz audio
VoIP Audio	HD Voice - G.722 (7 KHz), Telephone Audio - G.711 (3.4 KHz)
Open Duplex Conference	20 conference channels, Max 20 participants
Push to Talk Conference	50 conference channels, Unlimited number of participants Priority features
Group Call	250 groups, Unlimited number of participants Priority features
Call Modes	Open mode, Ringing mode, Call request mode, Priority features
Audio messaging	PA broadcasting, Auto-attendant, Voice guidance (doors, elevators), Security voice response
Compliance	CE, FCC Part 15

## INSTALLATION

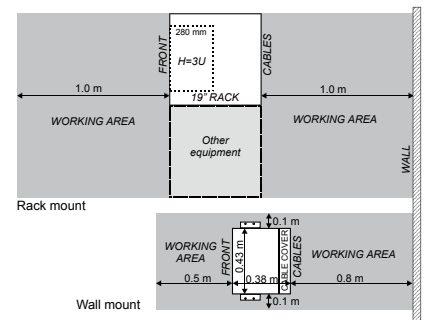

## CONNECTIONS

All cables are terminated to connectors on the backplane. The two-pair star wired intercom cables and single-pair telephone cables are connected using pluggable screw connectors.

Two RJ-45 Ethernet terminals are used for IP LAN, WAN, Internet and AlphaNet IP communication. Eth0 is also used for programming the PC. The serial ports with RS232 and RS422/RS485 interfaces are used for connecting to equipment using these protocols.

The two inputs for clean contacts on the RCI connectors can execute programmable functions. The 12 RCOs are connected to optional MRBD relay boards and can be programmed to execute functions such as door control.

Connectors 5 and 6 on the first ASLT line board are enabled for program distribution. Additional programs can be connected by substituting line boards with AGA boards with 6 programs per board.

The server is normally powered from the mains via a 24 VAC transformer. Battery backup power can be connected to the 24 VDC input plug.