

1490004010

ITSV-4

HD IP Video Phone with 5" Screen



- ✓ 16 lines with up to 16 SIP accounts
- ✓ 5.0" (1280×720) capacitive 5-point touch screen HD TFT LCD
- ✓ Built-in 2 mega-pixel CMOS tiltable camera with privacy shutter, 720p 30fps
- ✓ 10-way audio conferencing and 3-way video conferencing capability
- ✓ Dual-mic HD speakerphone with noise reduction, advanced echo cancellation, and excellent doubletalk performance
- ✓ Seamless Integration - Fully compatible with Zenitel Connect Pro, ICX-AlphaCom, IC-EDGE, and SIP-based systems.



Zenitel Connect



Video Intercom



SIP



Bluetooth

IC-EDGE IC-Edge

ICX ICX-AlphaCom

Audio



HD Voice Video




H.264

Description

The ITSV-4 is a powerful desktop video phone featuring Android 11, a 5" capacitive touch screen, tiltable camera, HDMI output, dual microphones, and support for 720p HD video. The ITSV-4 delivers advanced SIP telephony features and out-of-the-box integration with our Zenitel Connect Pro, IC-EDGE, and ICX-AlphaCom IP intercom platforms.

[Go to Zenitel Wiki for more information](#)

Technical Dimensions

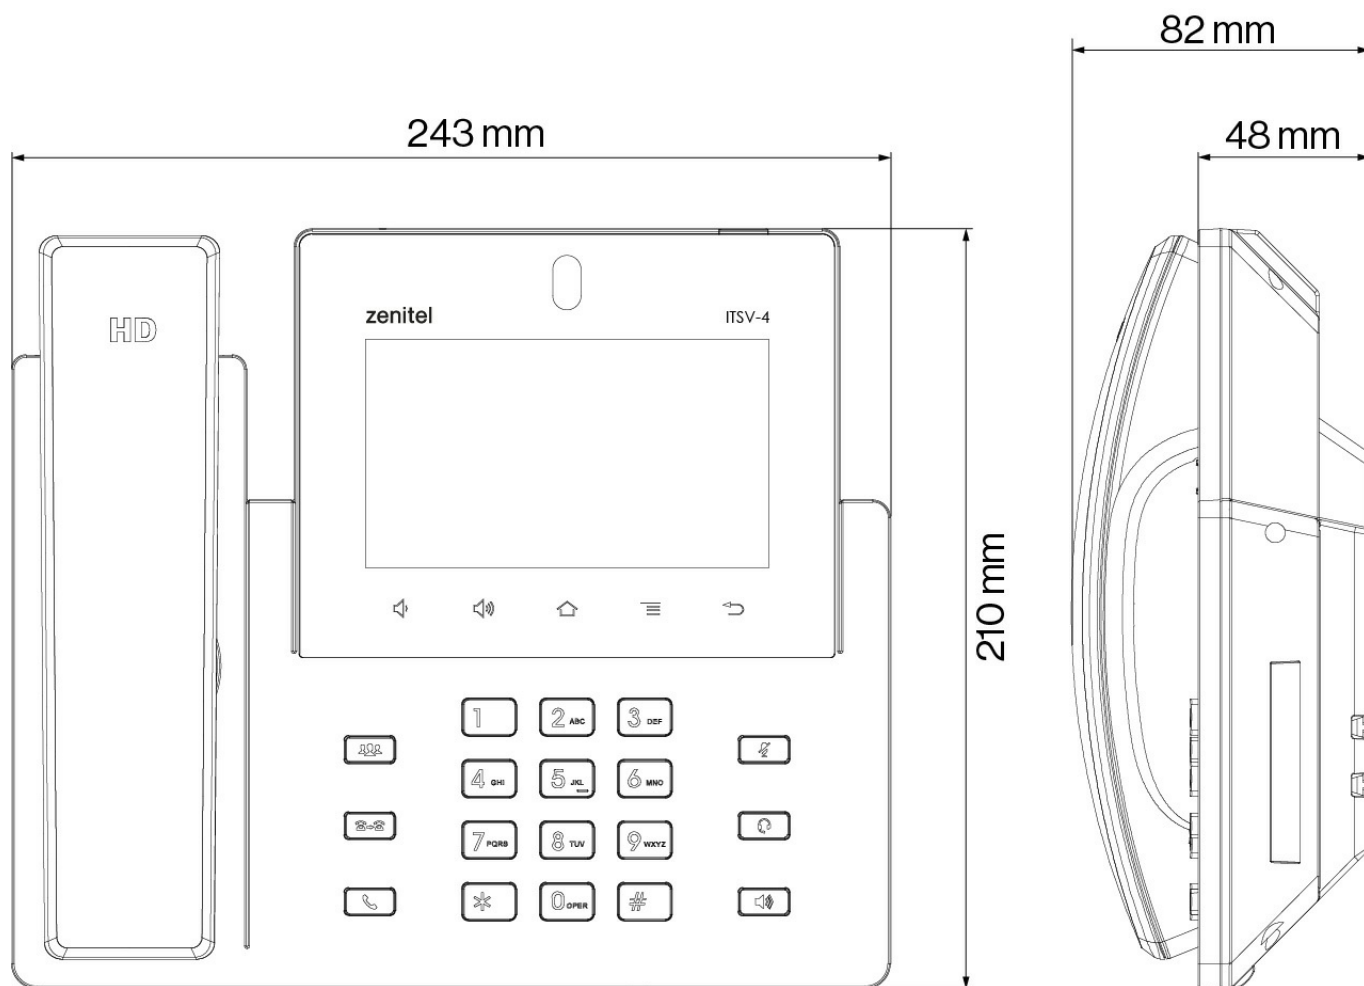

Specifications

SPECIFICATIONS

Graphic Display	5.0 inch 1280×720 capacitive touch screen (5 points) HD TFT LCD
Camera	Built-in 2 mega-pixel CMOS tiltable camera with privacy wheel, 1080p 30fps
Auxiliary Ports	RJ9 headset jack (allowing EHS with Plantronics headsets), extension module port, USB 2.0 port, USB 3.0 port
Feature keys	11 functions keys for CONFERENCE, TRANSFER, SEND/REDIAL, MUTE, EARPHONE, SPEAKERPHONE, VOLUME +/- . 3 dedicated Android keys for HOME, MENU, and BACK
Video Codec	H.263, H.264 BP/MP/HP
Video resolution	Up to 720p
Video frame rate	Up to 30 fps
Operating temperature range	0°C to +40°C
Storage temperature range	-10°C to +60°C
Relative humidity	10% - 90% non-condensing
Power options	Power over Ethernet (PoE & PoE+) or power adapter.
Power over Ethernet	802.3af Class 3, 802.3at Class 4
Power adapter	Input: 100-240VAC 50-60Hz; Output 12VDC 1.5A
Network Interface	2 x RJ45 (Ethernet) 10/100/1000 Mbps with integrated PoE/PoE+
Bluetooth	Integrated, Bluetooth 5
Wi-Fi	Integrated, dual-band 2.4 & 5GHz with 802.11 a/b/g/n/ac
Security	User and administrator level passwords, random default admin password, MD5 and MD5-session based authentication, 256bit-AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control, anti-hacking secure boot
Protocols/Standards	SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, LLDP-MED, LDAP, TR-069, 802.1x, TLS, SRTP, IPv6, OpenVPN®
	Wide-band Opus, wide-band G.722, G.711µ/a, G. 729A/B, G.726-32, G.726-16, G.726-8

Audio technology	iLBC, in-band and out-of-band DTMF (In audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS, Noise Shield 2.0
Language support	English, German, Italian, French, Spanish, Portuguese, Russian, Croatian, Chinese, Korean and Japanese
Compliance	FCC: Part 15 (CFR 47) Class B; UL 60950 (power adapter); Part68 (HAC) CE: EN55022 Class B, EN55024, EN61000-3-2, EN61000- 3-3, EN60950-1, EN62479, RoHS RCM: AS/ACIF S004; AS/NZS CISPR22/24; AS/NZS 60950; AS/NZS 4268 Safety
Dimensions (WxLxH)	243 x 210 x 48 mm
Weight	1 kg
Warranty	2 Years standard warranty, extendible up to total of 5 years (additional fee)

Accessories



Wall Mount Bracket for ITSV-4

Item Number: 1490009006

Used With



TCIV-2+ | Video intercom

IP and SIP Video Intercom

Item Number: 1008315020



TCIV-3+ | Video intercom

IP and SIP Video Intercom

Item Number: 1008315030



TCIV-5+ | Video intercom

IP and SIP Video Intercom

Item Number: 1008315050



TCIV-6+ | Video Intercom

IP and SIP Video Intercom

Item Number: 1008315060



TKIV+ Video Intercom kit

Turbine Video - VoIP Intercom Module

Item Number: 1008331010



TEIV-4+ | Video Intercom with RFID card reader space

IP & SIP Video Intercom with RFID card reader space

Item Number: 1008318240



TEIV-1+ | Video Intercom with Keypad and Display

IP and SIP Video Intercom with Keypad and Display

Item Number: 1008317110